

WAGO ETHERNET Accessories 852



852-111 **Industrial ECO Switch** **5 Ports 100BASE-TX**

© 2020 WAGO Kontakttechnik GmbH & Co. KG
All rights reserved.

WAGO Kontakttechnik GmbH & Co. KG

Hansastraße 27
D-32423 Minden

Phone: +49 (0) 571/8 87 – 0
Fax: +49 (0) 571/8 87 – 1 69

E-Mail: info@wago.com

Web: www.wago.com

Technical Support

Phone: +49 (0) 571/8 87 – 4 45 55
Fax: +49 (0) 571/8 87 – 84 45 55

E-Mail: support@wago.com

Every conceivable measure has been taken to ensure the accuracy and completeness of this documentation. However, as errors can never be fully excluded, we always appreciate any information or suggestions for improving the documentation.

E-Mail: documentation@wago.com

We wish to point out that the software and hardware terms as well as the trademarks of companies used and/or mentioned in the present manual are generally protected by trademark or patent.

WAGO is a registered trademark of WAGO Verwaltungsgesellschaft mbH.

Table of Contents

1	Notes about this Documentation	5
1.1	Validity of this Documentation.....	5
1.2	Copyright.....	5
1.3	Symbols	6
1.4	Number Notation	8
1.5	Font Conventions	8
2	Important Notes.....	9
2.1	Legal Bases.....	9
2.1.1	Subject to Changes.....	9
2.1.2	Personnel Qualification	9
2.1.3	Proper Use of the Industrial Switches.....	9
2.1.4	Technical Condition of Specified Devices.....	10
2.1.5	Standards and Regulations for Operating the Industrial Switches	10
2.2	Safety Advice (Precautions).....	11
2.3	Special Use Conditions for ETHERNET Devices	13
3	General	14
3.1	Scope of Supply	14
3.2	Industrial ETHERNET Technology.....	14
3.3	Switching Technology.....	14
3.4	Autonegotiation	14
3.5	Functioning of Switches.....	15
3.6	Port Speed & Duplex Mode	15
4	Device Description	16
4.1	View	17
4.1.1	Front View.....	17
4.1.2	Top View.....	18
4.2	Connectors.....	19
4.2.1	Grounding screw.....	19
4.2.2	Power Supply (PWR).....	19
4.2.3	Network Connection.....	20
4.2.3.1	10/100BASE-TX Ports.....	20
4.3	Display Elements.....	21
4.3.1	Power Supply LED.....	21
4.3.2	Network LEDs.....	22
4.4	Technical Data	23
4.4.1	Device Data	23
4.4.2	Power Supply.....	23
4.4.3	Communication	23
4.4.4	Environmental Conditions	24
4.5	Approvals	25
5	Mounting.....	26
5.1	Installation site.....	26
5.2	Installation on a Carrier Rail.....	26
5.3	Removal from Carrier Rail	26

5.4	Screw Mounting.....	26
6	Connect Devices	27
6.1	Power Supply	27
7	Accessories.....	28
8	Appendix.....	29
8.1	RJ-45 Cable	29
8.2	Drilling Template for Screw Mounting	31
	List of Figures	33
	List of Tables	34

1 Notes about this Documentation



Note

Always retain this documentation!

This documentation is part of the product. Therefore, retain the documentation during the entire service life of the product. Pass on the documentation to any subsequent user. In addition, ensure that any supplement to this documentation is included, if necessary.

1.1 Validity of this Documentation

This documentation is only applicable to WAGO ETHERNET accessory products “Industrial ECO Switch” (852-111).

This documentation is only applicable from .

1.2 Copyright

This Manual, including all figures and illustrations, is copyright-protected. Any further use of this Manual by third parties that violate pertinent copyright provisions is prohibited. Reproduction, translation, electronic and phototechnical filing/archiving (e.g., photocopying) as well as any amendments require the written consent of WAGO Kontakttechnik GmbH & Co. KG, Minden, Germany. Non-observance will involve the right to assert damage claims.

1.3 Symbols

 **DANGER****Personal Injury!**

Indicates a high-risk, imminently hazardous situation which, if not avoided, will result in death or serious injury.

 **DANGER****Personal Injury Caused by Electric Current!**

Indicates a high-risk, imminently hazardous situation which, if not avoided, will result in death or serious injury.

 **WARNING****Personal Injury!**

Indicates a moderate-risk, potentially hazardous situation which, if not avoided, could result in death or serious injury.

 **CAUTION****Personal Injury!**

Indicates a low-risk, potentially hazardous situation which, if not avoided, may result in minor or moderate injury.

NOTICE**Damage to Property!**

Indicates a potentially hazardous situation which, if not avoided, may result in damage to property.

NOTICE**Damage to Property Caused by Electrostatic Discharge (ESD)!**

Indicates a potentially hazardous situation which, if not avoided, may result in damage to property.

Note**Important Note!**

Indicates a potential malfunction which, if not avoided, however, will not result in damage to property.



Information

Additional Information:

Refers to additional information which is not an integral part of this documentation (e.g., the Internet).

1.4 Number Notation

Table 1: Number Notation

Number Code	Example	Note
Decimal	100	Normal notation
Hexadecimal	0x64	C notation
Binary	'100' '0110.0100'	In quotation marks, nibble separated with dots (.)

1.5 Font Conventions

Table 2: Font Conventions

Font Type	Indicates
<i>italic</i>	Names of paths and data files are marked in italic-type. e.g.: <i>C:\Program Files\WAGO Software</i>
Menu	Menu items are marked in bold letters. e.g.: Save
>	A greater-than sign between two names means the selection of a menu item from a menu. e.g.: File > New
Input	Designation of input or optional fields are marked in bold letters, e.g.: Start of measurement range
"Value"	Input or selective values are marked in inverted commas. e.g.: Enter the value "4 mA" under Start of measurement range .
[Button]	Pushbuttons in dialog boxes are marked with bold letters in square brackets. e.g.: [Input]
[Key]	Keys are marked with bold letters in square brackets. e.g.: [F5]

2 Important Notes

This section includes an overall summary of the most important safety requirements and notes that are mentioned in each individual section. To protect your health and prevent damage to devices as well, it is imperative to read and carefully follow the safety guidelines.

2.1 Legal Bases

2.1.1 Subject to Changes

WAGO Kontakttechnik GmbH & Co. KG reserves the right to provide for any alterations or modifications. WAGO Kontakttechnik GmbH & Co. KG owns all rights arising from the granting of patents or from the legal protection of utility patents. Third-party products are always mentioned without any reference to patent rights. Thus, the existence of such rights cannot be excluded.

2.1.2 Personnel Qualification

All sequences implemented on Series 852 devices may only be carried out by electrical specialists with sufficient knowledge in automation. The specialists must be familiar with the current norms and guidelines for the devices and automated environments.

All changes to the controller should always be carried out by qualified personnel with sufficient sufficient skills in PLC programming.

2.1.3 Proper Use of the Industrial Switches

The device is designed for the IP30 protection class. It is protected against the insertion of solid items and solid impurities up to 2.5 mm in diameter, but not against water penetration. Unless otherwise specified, the device must not be operated in wet and dusty environments.

2.1.4 Technical Condition of Specified Devices

The devices to be supplied ex works are equipped with hardware and software configurations, which meet the individual application requirements. These modules contain no parts that can be serviced or repaired by the user. The following actions will result in the exclusion of liability on the part of WAGO Kontakttechnik GmbH & Co. KG:

- Repairs,
- Changes to the hardware or software that are not described in the operating instructions,
- Improper use of the components.

Further details are given in the contractual agreements. Please send your request for modified and new hardware or software configurations directly to WAGO Kontakttechnik GmbH & Co. KG.

2.1.5 Standards and Regulations for Operating the Industrial Switches

Please observe the standards and regulations that are relevant to installation:

- The data and power lines must be connected and installed in compliance with the standards to avoid failures on your installation and eliminate any danger to personnel.
- For installation, startup, maintenance and repair, please observe the accident prevention regulations of your machine (e.g., DGUV Regulation "Electrical Installations and Equipment").
- Emergency stop functions and equipment must not be deactivated or otherwise made ineffective. See relevant standards (e.g., EN 418).
- Your installation must be equipped in accordance to the EMC guidelines so electromagnetic interferences can be eliminated.
- Please observe the safety measures against electrostatic discharge according to EN 61340-5-1/-3. When handling the modules, ensure that environmental factors (persons, workplace and packing) are well grounded.
- The relevant valid and applicable standards and guidelines regarding the installation of switch cabinets must be observed.

2.2 Safety Advice (Precautions)

For installing and operating purposes of the relevant device to your system the following safety precautions shall be observed:



DANGER

Do not work on devices while energized!

All power sources to the device shall be switched off prior to performing any installation, repair or maintenance work.

DANGER

Only install in appropriate housings, cabinets or electrical operation rooms!

WAGO's 852 Series ETHERNET Switches are considered exposed operating components. Therefore, only install these switches in lockable housings, cabinets or electrical operation rooms. Access must be limited to authorized, qualified staff having the appropriate key or tool.

DANGER

Ensure a standard connection!

To minimize any hazardous situations resulting in personal injury or to avoid failures in your system, the data and power supply lines shall be installed according to standards, with careful attention given to ensuring the correct terminal assignment. Always adhere to the EMC directives applicable to your application.

NOTICE

Do not use in telecommunication circuits!

Only use devices equipped with ETHERNET or RJ-45 connectors in LANs. Never connect these devices with telecommunication networks.

NOTICE

Replace defective or damaged devices!

Replace defective or damaged device/module (e.g., in the event of deformed contacts).

NOTICE**Protect the components against materials having seeping and insulating properties!**

The components are not resistant to materials having seeping and insulating properties such as: aerosols, silicones and triglycerides (found in some hand creams). If you cannot exclude that such materials will appear in the component environment, then install the components in an enclosure being resistant to the above-mentioned materials. Clean tools and materials are imperative for handling devices/modules.

NOTICE**Clean only with permitted materials!**

Clean housing and soiled contacts with propanol.

NOTICE**Do not use any contact spray!**

Do not use any contact spray. The spray may impair contact area functionality in connection with contamination.

NOTICE**Do not reverse the polarity of connection lines!**

Avoid reverse polarity of data and power supply lines, as this may damage the devices involved.

NOTICE**Avoid electrostatic discharge!**

The devices are equipped with electronic components that may be destroyed by electrostatic discharge when touched. Please observe the safety precautions against electrostatic discharge per DIN EN 61340-5-1/-3. When handling the devices, please ensure that environmental factors (personnel, work space and packaging) are properly grounded.

2.3 Special Use Conditions for ETHERNET Devices

If not otherwise specified, ETHERNET devices are intended for use on local networks. Please note the following when using ETHERNET devices in your system:

- Do not connect control components and control networks directly to an open network such as the Internet or an office network. WAGO recommends putting control components and control networks behind a firewall.
- Limit physical and electronic access to all automation components to authorized personnel only.
- Change the default passwords before first use! This will reduce the risk of unauthorized access to your system.
- Regularly change the passwords used! This will reduce the risk of unauthorized access to your system.
- If remote access to control components and control networks is required, use a Virtual Private Network (VPN).
- Regularly perform threat analyses. You can check whether the measures taken meet your security requirements.
- Use “defense-in-depth” mechanisms in your system's security configuration to restrict the access to and control of individual products and networks.

3 General

3.1 Scope of Supply

- Industrial Eco Switch
- Carrier rail support

3.2 Industrial ETHERNET Technology

The range of WAGO switches ensures scalability of your network infrastructure with outstanding electrical and mechanical characteristics. These robust devices are designed for industrial use and they are fully compliant with IEEE 802.3, 802.3u.

They have voltage supply with a supply voltage range of 18 ... 30 V.

Characteristics such as auto negotiation and auto MDI/MDIX (crossover) on all 10/100BASE-TX ports are realized.

3.3 Switching Technology

Industrial ETHERNET primarily uses switching technology. This technology allows any network subscriber to send at any time because the subscriber always has an open peer-to-peer connection to the next switch. The connection is bidirectional, i.e., the subscriber can send and receive at the same time (full duplex).

The targeted use of switching technology can increase real-time capability because the peer-to-peer connection prevents collisions in network communication.

3.4 Autonegotiation

Autonegotiation allows the switch to detect the transmission rate and operating mode for each port and the connected subscriber or subscribers, and to set them automatically. The highest possible mode (transmission speed and operating mode) is set.

Autonegotiation is available to ETHERNET subscribers connected to the switch via copper cable.

This makes the switch a plug-and-play device.

3.5 Functioning of Switches

Switches analyze all incoming data packages and forward them to the port where the corresponding destination address is located. Exceptions are the multicast and broadcast telegrams, which are forwarded to all active ports of the switch.

For selective forwarding of the telegrams, each switch contains of an address / port assignment table in which the assignments of the destination addresses to a specific port of the switch are stored. The address / port mapping table is typically generated and maintained automatically by the switch through a self-learning process. Incoming data packages are analyzed, filtered and forwarded directly to the appropriate port by using this assignment table based on their destination address. The incoming data package is sent to all ports, if there is no corresponding entry in the assignment table for a destination address. If a destination address answers, the assignment table is complemented with this destination address as well as the associated port.

3.6 Port Speed & Duplex Mode

After a cable is plugged into a specific port, the system uses auto negotiation to determine the transmission mode for the new twisted pair connection:

If the connected device does not support auto negotiation or has auto negotiation disabled, an auto sensing process is initiated to select the speed and set the duplex mode to half duplex.

4 Device Description

The 852-111 has 5 ports with each port featuring Autonegotiation and auto MDI/MDI-X detection.

Existing 10 Mbit/s networks can now be upgraded effortlessly to higher speed 100 Mbit/s Fast ETHERNET networks. The 852-111 5-port density can be used to create multiple segments to alleviate client congestion and provide dedicated bandwidth to each user node.

The 852-111 is a cost-effective solution to keep up with the constant demands for emerging IP-based industry communication needs. The switch can be easily configured and installed and is also ideally suited for small to medium-sized networks.

Other key features are:

- Five (5) 10/100BASE-TX Ports
- Comprehensive front-panel diagnostic LEDs
- Supports Auto-MDI/MDI-X
- Full/half-duplex transfer modes for each port
- Wide supply voltage range 18 ... 30 V
- Store-and-forward switching method
- Integrated address Look-Up Engine, supports 2 K absolute MAC addresses
- Supports surge protection
- Power input polarity protection function
- IEEE 802.3x flow control for full duplex
- Auto negotiation on all ports
- Rugged metal-IP30 case
- Vibration/Shock operational

4.1 View

4.1.1 Front View

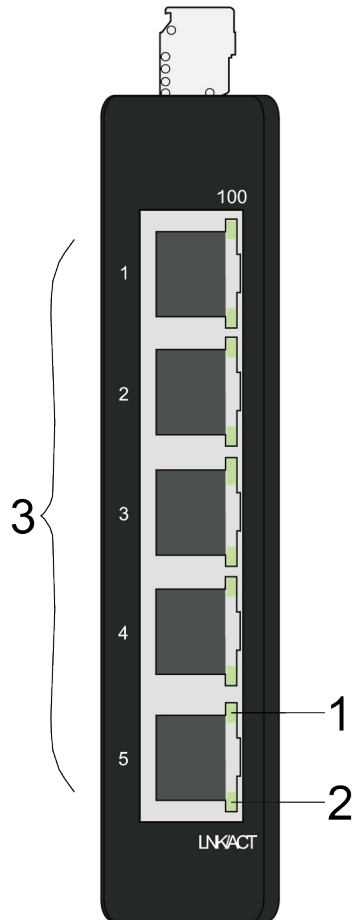


Figure 1: Front View of Industrial ECO Switch

Table 3: Legend for Figure „ Front View of Industrial ECO Switch “

Pos.	Description	Meaning	Details see Section
1	-	Status LED TX Port 100-Mbit/s (1 LED for each port)	“Device Description” > “Display Elements”
2	-	Status LED T Port LNK/ACT (1 LED for each port)	“Device Description” > “Display Elements”
3	-	Port 5 x RJ-45 (10/100BASE TX Ports)	“Device Description” > “Connectors”

4.1.2 Top View

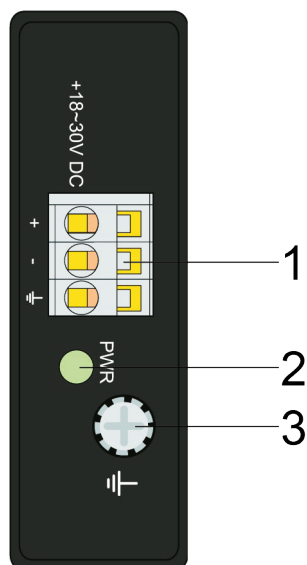


Figure 2: Top View of the Industrial ECO Switch

Table 4: Legend for Figure „ Top View of the Industrial ECO Switch “

Pos.	Description	Meaning	Details see Section
1	-	Terminal block (male connector) for power supply (PWR)	“Device Description” > “Connectors”
2	PWR	Status LED Power Supply	“Device Description” > “Display Elements”
3	-	Grounding screw	“Device Description” > “Grounding screw”

4.2 Connectors

4.2.1 Grounding screw

The switch must be grounded. Connect the grounding screw to the ground potential. Do not operate the switch without an appropriately installed protective earth conductor.



Figure 3: Grounding screw

4.2.2 Power Supply (PWR)

The female connector can easily be connected to the 3-pole male connector located on the top of the ECO switch.

The male connector shows the following pin assignment:




Figure 4: Power supply (PWR) port

Table 5: Legend for "Power supply (PWR) port" figure

Pin	Description	Description
+	PWR	Primary DC input
-	PWR	Primary DC input
≡	GND	Ground potential (functional earth)



NOTICE

Damage to Property Caused by Electrostatic Discharge (ESD)!

Industrial ECO switch for DC operation: Power supply is provided via an external direct-current power source. As the industrial ECO switch is not equipped with a power switch, it switches on immediately when you apply the direct-current power supply.

4.2.3 Network Connection

The Industrial eco switch uses ports with copper connectors that can be used with ETHERNET.

4.2.3.1 10/100BASE-TX Ports

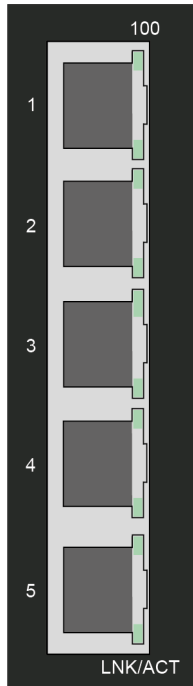


Figure 5: 10/100BASE-TX

The 10/100BASE-TX ports support network speeds of either 10 Mbit/s or 100 Mbit/s, and can operate in half- and full-duplex transfer modes. The ports also offer automatic MDI/MDI-X crossover detection that gives true “plug and play” capability – just plug the network cables into the ports and the ports will adjust according to the end-node devices. The following are the recommended cables for the RJ-45 connectors:

- 100 m – Cat. 5 or better

4.3 Display Elements

The industrial ECO switch is equipped with a power LED (“PWR”) and with network LEDs (“1000” or “10/100”) for the appropriate port.

You can see the status of the industrial ECO switch at a quick glance of the power supply LED, while the network LEDs provide information about the connection actions.

4.3.1 Power Supply LED



Figure 6: Power supply LED

Table 6: Legend for “Power supply LED” figure

LED	Name	Status	Description
PWR	Primary Power LED	Green	The industrial ECO switch uses the primary power supply.
		OFF	The primary power supply has been switched off, or a fault has occurred.

4.3.2 Network LEDs

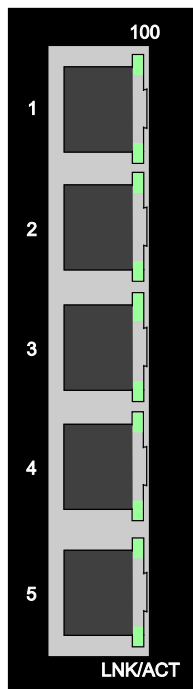


Figure 7: Network LEDs

Table 7: Legend for "Network LEDs" figure

LED	Name	Status	Description
100	100BASE-TX-Port-LED (1 LED for each port)	Green	Port operating at 100 Mbit/s.
		Flashing	Data traffic being routed over the port.
		OFF	Connection in operation at less than 100 Mbit/s.
LNK/ACT	LNK/ACT-Port-LED (1 LED for each port)	Green	Illuminated when connectors are attached (1 LED for each port).
		Flashing	Data traffic passing through port.
		OFF	No valid link established on port.

4.4 Technical Data

4.4.1 Device Data

Table 8: Technical Data - Device Data

Width	Wall mounting	97 mm
	Carrier rail mounting	23.4 mm
Height	Wall mounting	23.4 mm
	Carrier rail mounting	73.8 mm (from the top edge of the carrier rail)
Length	Wall mounting	109.2 mm
	Carrier rail mounting	109.2 mm
Weight		145 g
Mounting		Wall mounting (horizontal or vertical), or mounting on a carrier rail
Degree of protection		IP30

4.4.2 Power Supply

Table 9: Technical Data – Power Supply

Supply voltage	18 ... 30 VDC
Power consumption, max.	3 W

4.4.3 Communication

Table 10: Technical Data - Communication

Ports	5 x 10/100BASE-TX (RJ-45)
Standards	IEEE 802.3 10BASE-T IEEE 802.3u 100BASE-TX/FX IEEE 802.3x Flow Control
Topology	Star

4.4.4 Environmental Conditions


Table 11: Technical data - environmental conditions

Surrounding air temperature, operatio)	-40 ... +70 °C max. +60 °C (UL)
Surrounding air temperature, operation, DNV GL (Temperature class D)	-25 ... +70 °C
Surrounding air temperature, storage	-40 ... +80 °C
UL 508 Use Pollution degree	Indoor 2
Relative humidity (without condensation)	5 ... 95 %
Vibration resistance	Acc. to IEC 60068-2-6
Shock resistance	Acc. to IEC 60068-2-27
EMC-1 immunity to interference	Acc. to EN 61000-6-2
EMC-1 Emission of interference	Acc. to EN 61000-6-4
Standard Compass Safe Distance 0.3 Degree deflection	1000 mm
Steering, Standby, Emergency Compass Safe Distance 1.0 Degree deflection	650 mm

4.5 Approvals

The following approvals have been granted for the WAGO ETHERNET accessory product “Industrial ECO Switch” (852-111):

 Conformity Marking

 UL508
(E175199)

The following ship approvals have been granted for the WAGO ETHERNET accessory product “Industrial ECO Switch” (852-111):



DNV GL
[Temperature: D, Humidity: B, Vibration: C, EMC: B,
Enclosure: A]

The DNV GL Marine Type Approval is only valid if using the 852-9101 Carrier Rail Adapter in conjunction with an ETHERNET Switch. This adapter is available as an accessory (see “Accessories” section).

5 Mounting

5.1 Installation site

The location selected to install the industrial ECO switch may greatly affect its performance. When selecting a site, we recommend considering the following rules:

- Install the industrial ECO switch at an appropriate place. See section “Device Description” > ... > “Technical Data“ for the acceptable temperature and humidity operating ranges.
- Fix the provided brackets at the back of the industrial ECO switch to a carrier rail to protect the industrial ECO switch from falling.

Make sure that the heat output from the Industrial Eco Switch and ventilation around it is adequate. Do not place any heavy objects on the Industrial Eco Switch.

5.2 Installation on a Carrier Rail

The carrier rail must optimally support the EMC measures integrated into the system and the shielding of the internal data bus connections.

Place the Industrial Eco Switch onto the DIN rail from the top and snap it into position.

5.3 Removal from Carrier Rail

To remove the Industrial Eco Switch from the carrier rail, insert a suitable tool into the metal tab under the switch and deflect the metal tab downward.

You can then release the switch down from the carrier rail and remove it upwards.

5.4 Screw Mounting

The industrial ECO switch can be mounted vertically or horizontally directly on an even surface using the boreholes on the side of the device.

The surface must be able to bear at least 1.5 kg for the industrial ECO switch.

Use the drilling template given in the appendix to mark the boreholes.

6 Connect Devices

6.1 Power Supply

The Industrial Eco Switch uses direct-current power supply of 18 ... 30 V,

The primary network link is established via a 6-pin plug-in connection located on the top of the Industrial Eco Switch.

The female connector (order-no. 2231-103/026-000) is composed of three connecting terminals and can be inserted and removed easily by hand to connect to the 3-pin plug connector located on the top of the switch.

1. Connect a suitable grounding conductor to the grounding lug on the top of the switch.

Note



Ground for the switch

The ground for the switch prevents electromagnetic interference from electromagnetic radiation.

Observe the corresponding standards for EMC-compatible installations as well.

2. Plug the female connector into the male connector of the switch if it has not already been plugged in. Check the tight fit of the multipoint connector by gently shaking it.
3. PWR +/-:
To connect or disconnect the conductors, actuate the spring directly in the female connector using a screwdriver or an operating tool and insert or remove the conductor.
4. Check whether the power LED "PWR" on the top of the device lights up when power is supplied to the device. If not, check to ensure that the power cable is plugged in correctly and fits securely.

7 Accessories

Table 12: Accessories

Description	Item Number
Carrier Rail Adapter	852-9101

The 852-9101 Carrier Rail Adapter is required for “Industrial ECO Switch” (852-111) installations that comply with the DNV GL standard.

8 Appendix

8.1 RJ-45 Cable

Always use category 5e cables to connect your network devices. The pin assignment is given below:

Table 13: RJ-45 Cable

Contact	Description		Pair	Color (acc. EIA/TIA 568B)
	4-wire	8-wire		
1	TD	D1+	2	White/Orange
2	TD-	D1-	2	Orange
3	RX+	D2+	3	White/Green
4	Not assigned	D3+	1	Blue
5	Not assigned	D3-	1	White/Blue
6	RX-	D2-	3	Green
7	Not assigned	D4+	4	White/Brown
8	Not assigned	D4-	4	Brown

Note



Functions on the RJ45 connector

The industrial ECO switch offers the functions autocrossing und autonegotiation to the RJ-45 connection.

8.2 Drilling Template for Screw Mounting

The industrial ECO switch can be mounted vertically or horizontally using the boreholes on the side of the device.

Use the drilling template shown below to mark the boreholes.

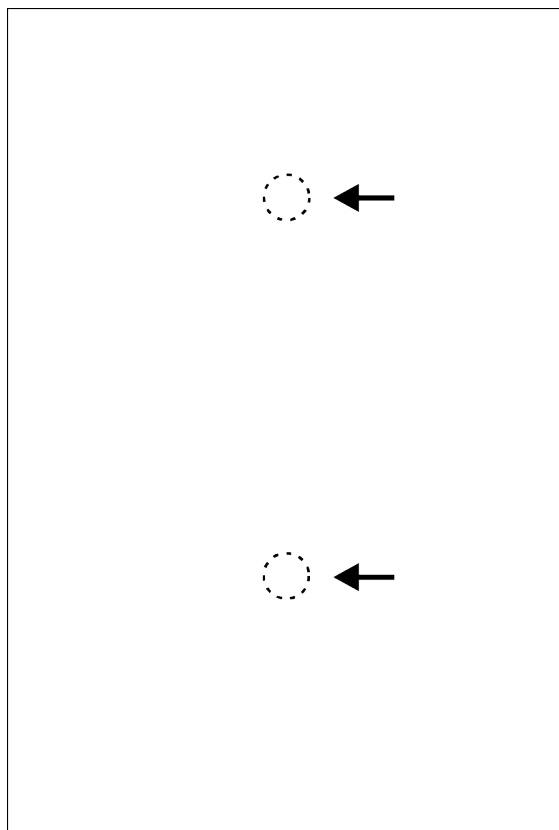


Figure 8: Drilling template

List of Figures

Figure 1: Front View of Industrial ECO Switch.....	17
Figure 2: Top View of the Industrial ECO Switch	18
Figure 3: Grounding screw	19
Figure 4: Power supply (PWR) port.....	19
Figure 5: 10/100BASE-TX.....	20
Figure 6: Power supply LED.....	21
Figure 7: Network LEDs	22
Figure 8: Drilling template.....	31

List of Tables

- Table 1: Number Notation8
- Table 2: Font Conventions8
- Table 3: Legend for Figure „ Front View of Industrial ECO Switch “17
- Table 4: Legend for Figure „ Top View of the Industrial ECO Switch “18
- Table 5: Legend for “Power supply (PWR) port” figure19
- Table 6: Legend for “Power supply LED” figure21
- Table 7: Legend for “Network LEDs” figure22
- Table 8: Technical Data - Device Data23
- Table 9: Technical Data – Power Supply.....23
- Table 10: Technical Data - Communication.....23
- Table 11: Technical data - environmental conditions24
- Table 12: Accessories28
- Table 13: RJ-45 Cable29



WAGO Kontakttechnik GmbH & Co. KG
Postfach 2880 • D - 32385 Minden
Hansastraße 27 • D - 32423 Minden
Phone: +49 571 887 – 0
Fax: +49 571 887 – 844169
E-Mail: info@wago.com
Internet: www.wago.com